

ADAMS

Advanced **D**ata mining And Machine learning **S**ystem

Module: adams-imaging-imagemagick



Peter Reutemann

January 7, 2021

©2009-2015



THE UNIVERSITY OF
WAIKATO
Te Whare Wānanga o Waikato



Except where otherwise noted, this work is licensed under
<http://creativecommons.org/licenses/by-sa/4.0/>

Contents

1	ImageMagick	7
	Bibliography	9

List of Figures

1.1	ImageMagick flow for processing (resizing) a single image.	8
1.2	ImageMagick commands to resizing.	8
1.3	The original image.	8
1.4	The resized image.	8

Chapter 1

ImageMagick

ImageMagick® is a software suite to create, edit, compose, or convert bitmap images ([2]). On Windows, in order to process images with ImageMagick, you need to set the `IM_TOOLPATH` environment variable, pointing to the installation. Similar, for `dcraw`, you need to defined the `DCRAW_TOOLPATH` variable and, for `ufraw`, the `UFRAW_TOOLPATH` one.

The following ImageMagick actors available:

- `transformer.ImageMagickOperation` – performs the ImageMagick (convert, `dcraw`, `ufraw`) operations that the user selected from the class hierarchy.
- `transformer.ImageMagickTransformer` – performs any ImageMagick command on the incoming image that the `convert` tool¹ supports and outputs another image again.

Reading and writing images are done using the *ImageReader* transformer and *ImageWriter* sink:

- `ImageReader` – use the *ImageMagickImageReader* or *UIfrawImageReader*
- `ImageWriter` – use the *ImageMagickImageWriter*

There is no separate transformer for generating a WEKA instance, since the ImageMagick actors process and output `BufferedImageContainer` objects as well, just like the JAI actors. You can use the `BufferedImageFeatureGenerator` for generating WEKA output.

The example flow² in Figure 1.1 loads a single photo from disk and then uses ImageMagick to resize it to 90 by 90 pixels and scaling it by 200% (see 1.2). Finally, the modified image is displayed in the image viewer.

¹<http://www.imagemagick.org/script/convert.php>

²`adams-imaging-imagemagick_script.flow`

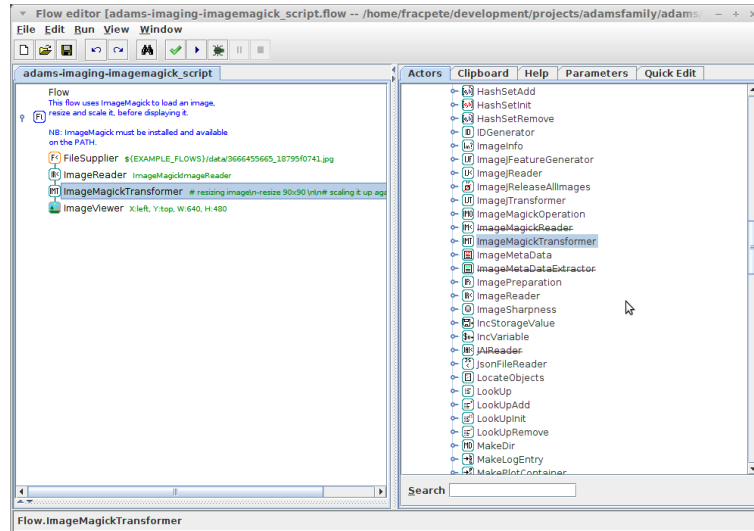


Figure 1.1: ImageMagick flow for processing (resizing) a single image.

```
# resizing image
-resize 90x90
# scaling it up again
-scale 200%
```

Figure 1.2: ImageMagick commands to resizing.

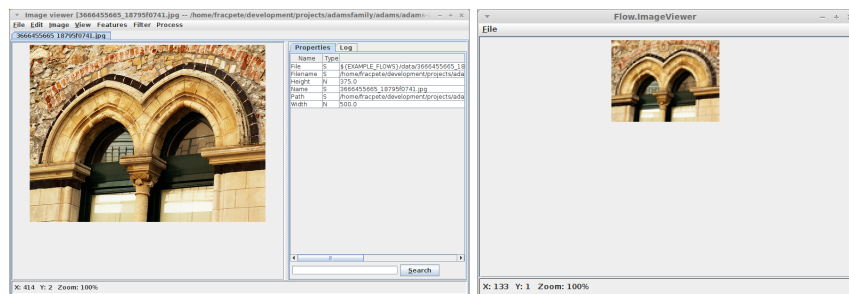


Figure 1.3: The original image.

Figure 1.4: The resized image.

Bibliography

- [1] *ADAMS* – Advanced Data mining and Machine learning System
<https://adams.cms.waikato.ac.nz/>
- [2] *ImageMagick* – Software suite to Convert, Edit, and Compose Images
<http://www.imagemagick.org/>